



Reticle   
Catalogue

Thermal Imaging Riflescope

**THERMION 2 LRF XL50**

## Non-scalable reticles

The values of the non-scalable reticles are correct in the following cases:

- when the magnification of the scope is set to minimum
- when "picture in picture" is activated



**D50i**



**C50i**



**X54i**



**H50i**



**X50i**



**T54**



**M58i**



**X51Fi-300**



**M56Fi (Mil-Dot)**




**M57Fi (Mil-Dot)**

## Scalable reticles

Reticle parameters apply to all magnifications

# D50i

**Reticle parameters**  
(for minimum magnification)

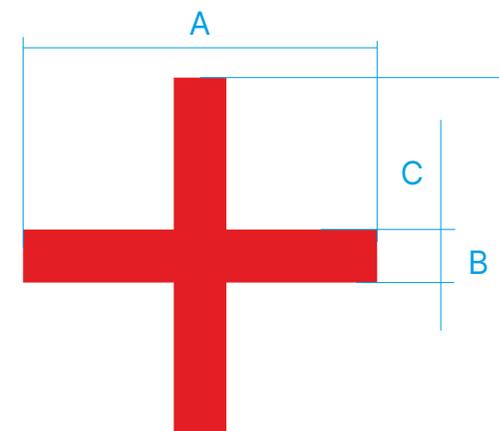

	MOA	cm @ 100 m
<b>Section A</b>	4.1	11.9
<b>Section B</b>	4.1	11.9
<b>Section C</b>	0.6	1.7



Thermal Imaging Riflescope

## **THERMION 2 LRF XL50**

[↑ TO CONTENT](#)

# C50i

Reticle parameters  
(for minimum magnification)

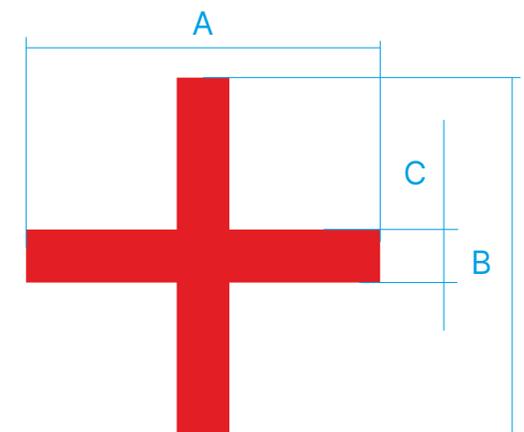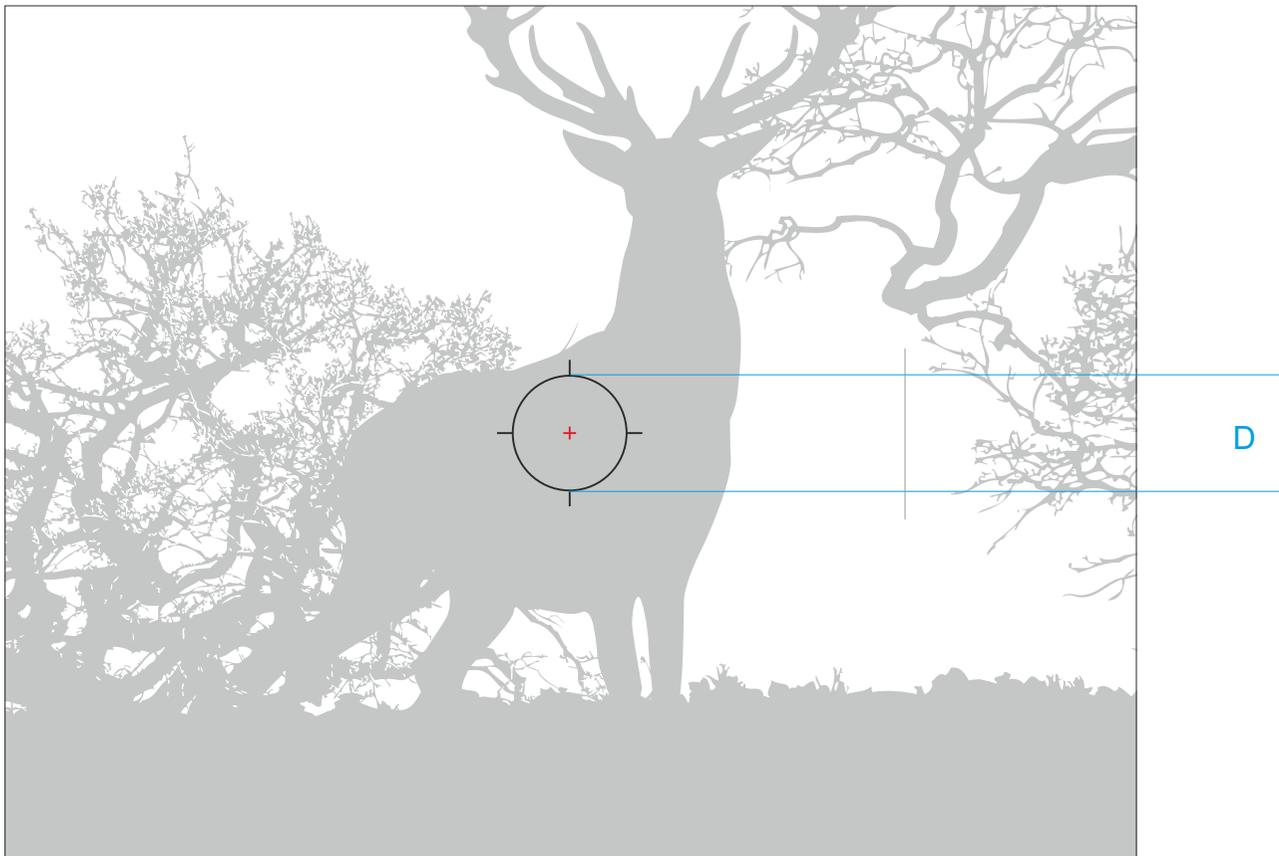

	MOA	cm @ 100 m
Section A	4.1	11.9
Section B	4.1	11.9
Section C	0.6	1.7
Section D	68.8	200



Thermal Imaging Riflescope

## THERMION 2 LRF XL50

[↑ TO CONTENT](#)

# X54i

**Reticle parameters**  
(for minimum magnification)

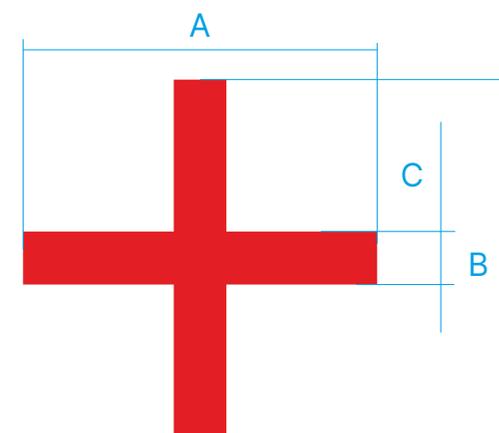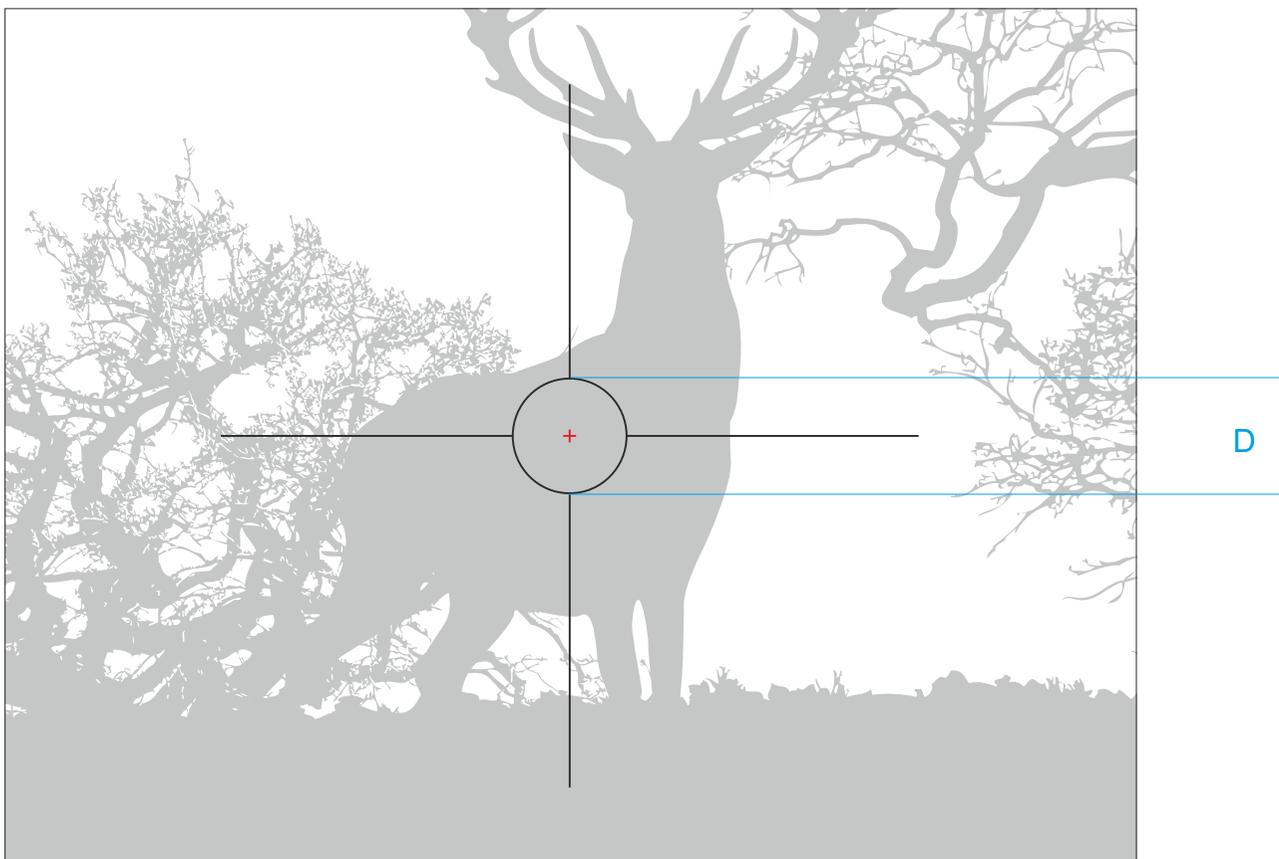


	MOA	cm @ 100 m
<b>Section A</b>	4.1	11.9
<b>Section B</b>	4.1	11.9
<b>Section C</b>	0.6	1.7
<b>Section D</b>	68.8	200

Thermal Imaging Riflescope


## THERMION 2 LRF XL50

[↑ TO CONTENT](#)

# H50i

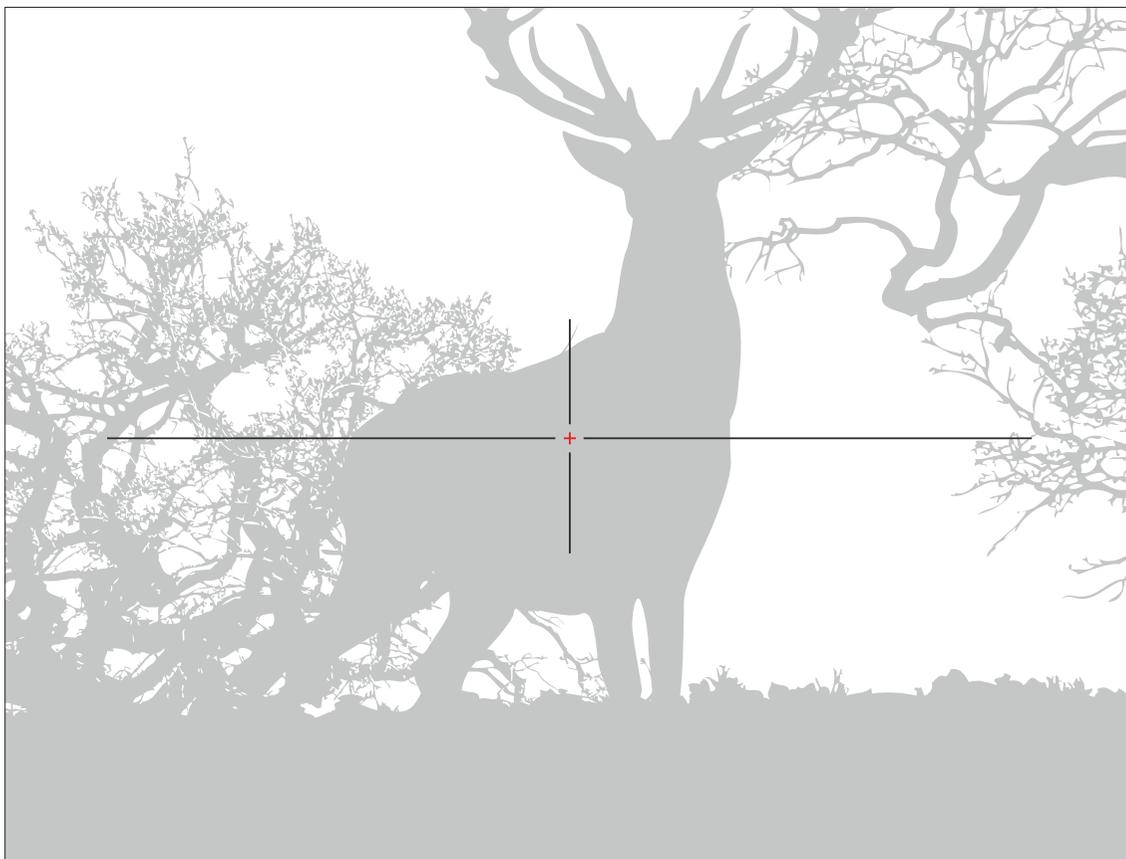

**Reticle parameters**  
(for minimum magnification)

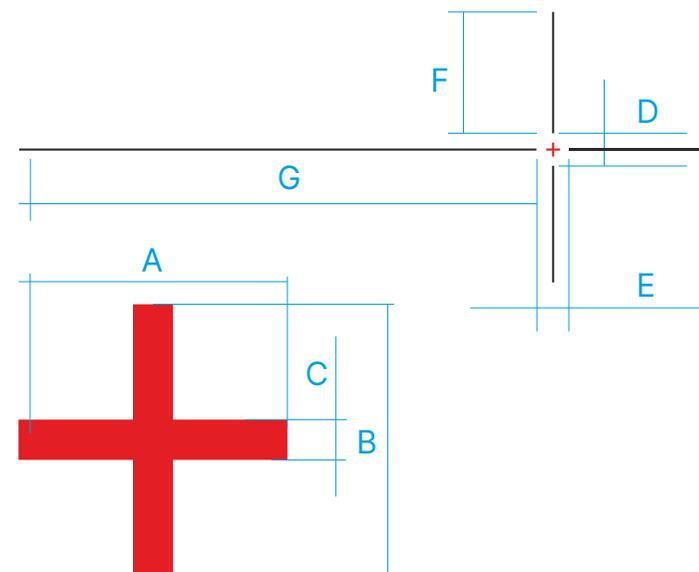


	MOA	cm @ 100 m
<b>Section A</b>	4.1	11.9
<b>Section B</b>	4.1	11.9
<b>Section C</b>	0.6	1.7
<b>Section D</b>	20	58
<b>Section E</b>	20	58
<b>Section F</b>	49	142.5
<b>Section G</b>	174.5	507.5


Thermal Imaging Riflescope

## THERMION 2 LRF XL50

# X50i

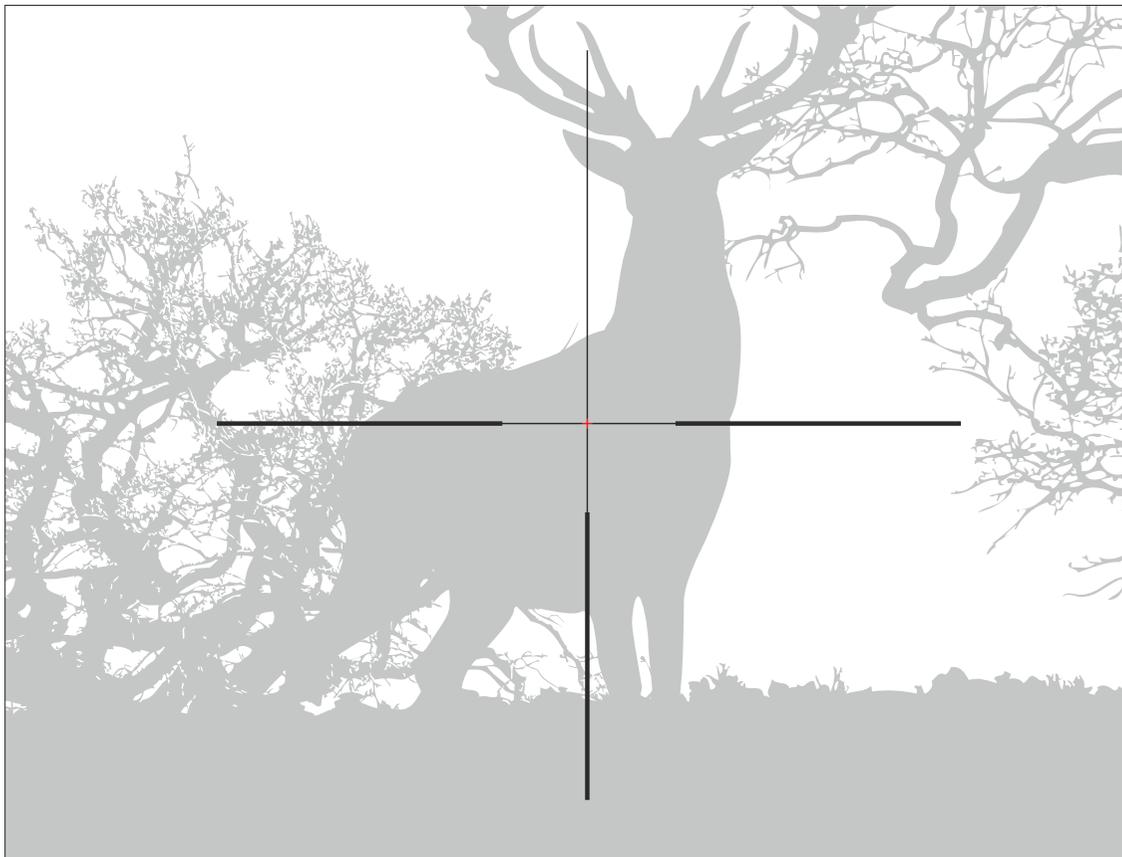

**Reticle parameters**  
(for minimum magnification)

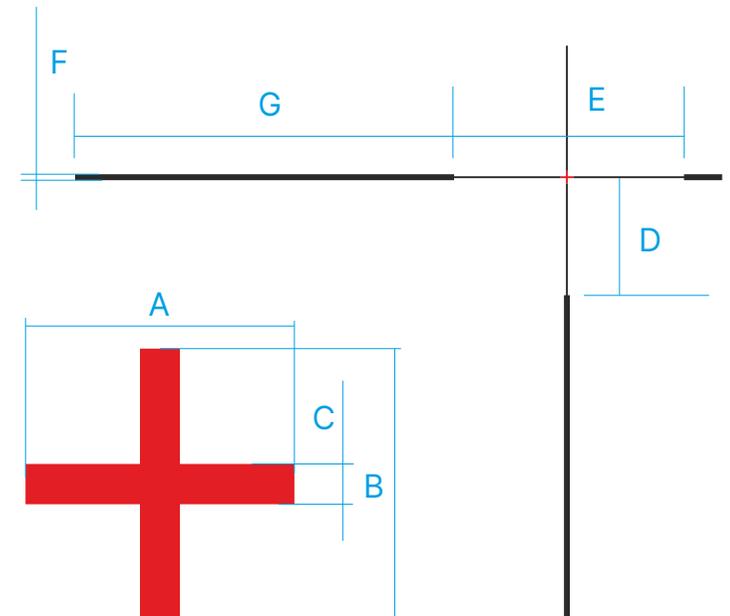

	MOA	cm @ 100 m
<b>Section A</b>	4.1	11.9
<b>Section B</b>	4.1	11.9
<b>Section C</b>	0.6	1.7
<b>Section D</b>	34.4	100
<b>Section E</b>	68.8	200
<b>Section F</b>	1.8	5.1
<b>Section G</b>	150.1	436.5

Thermal Imaging Riflescope


## THERMION 2 LRF XL50

↑ TO CONTENT

# T54



Reticle parameters  
(for minimum magnification)

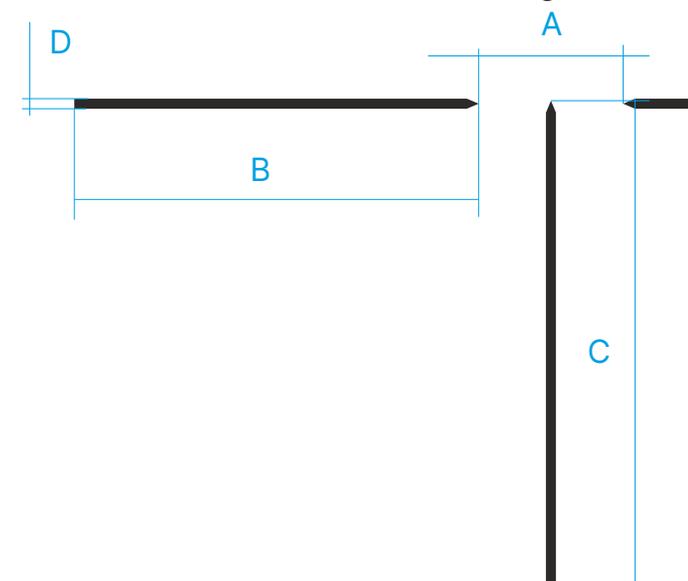


	MOA	cm @ 100 m
<b>Section A</b>	68.8	200
<b>Section B</b>	149.1	437.5
<b>Section C</b>	185	538
<b>Section D</b>	4.1	11.9

Thermal Imaging Riflescope


## THERMION 2 LRF XL50

[↑ TO CONTENT](#)

# M58i

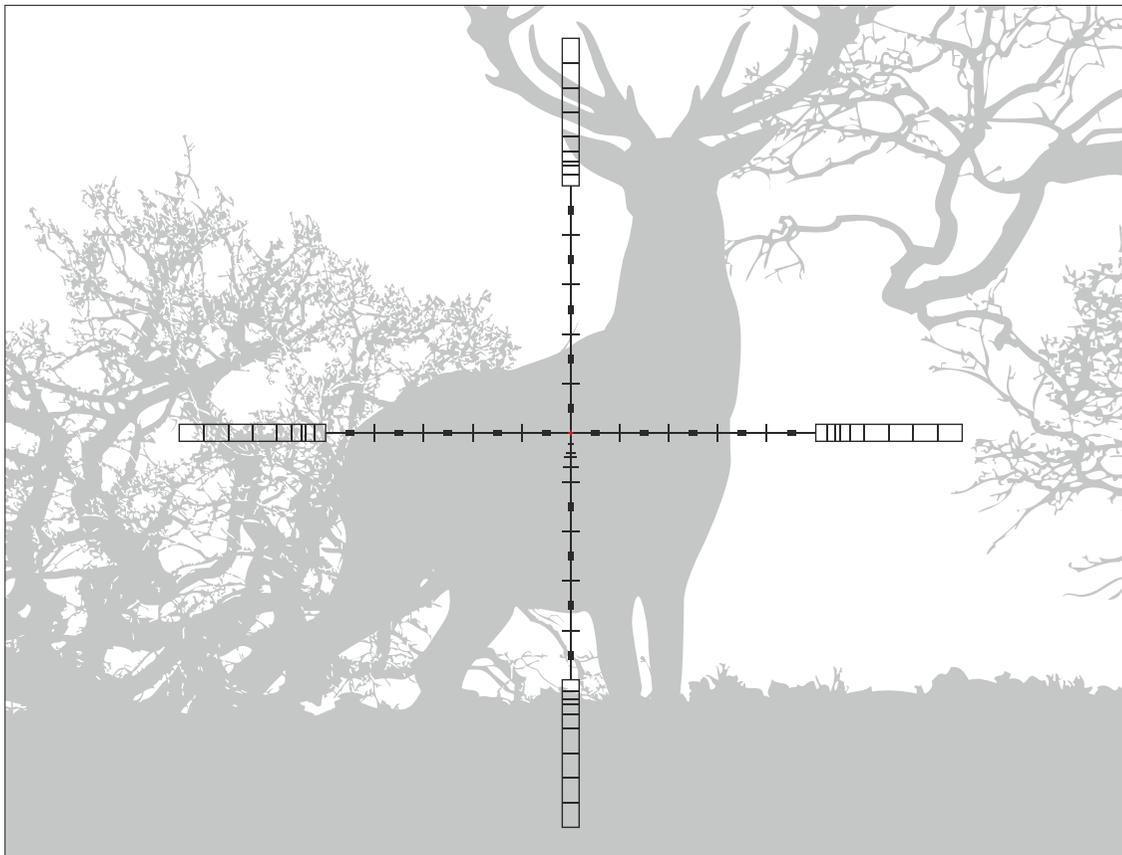

Reticle parameters

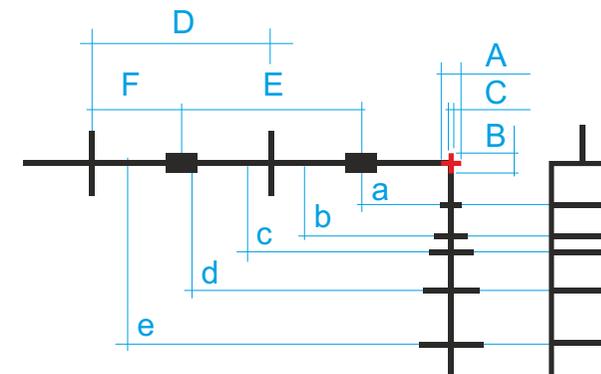


	MOA	cm @ 100 m
<b>Section A</b>	1.8	5.2 on 1.75x magnification
<b>Section B</b>	1.8	5.2 on 1.75x magnification
<b>Section C</b>	0.6	1.7 on 1.75x magnification
<b>Section D</b>	3.5	10 (1 mil) on 10x magnification
<b>Section E</b>	3.5	10 (1 mil) on 10x magnification
<b>Section F</b>	3.5	10 (1 mil) on 5x magnification

<b>Section a</b>	1 mil (10 cm @ 100 m) on 1.75x magnification
<b>Section b</b>	1 mil (10 cm @ 100 m) on 3.5x magnification
<b>Section c</b>	1 mil (10 cm @ 100 m) on 7x magnification
<b>Section d</b>	1 mil (10 cm @ 100 m) on 10.5x magnification
<b>Section e</b>	1 mil (10 cm @ 100 m) on 14x magnification


Thermal Imaging Riflescope

## THERMION 2 LRF XL50

# X51 Fi-300

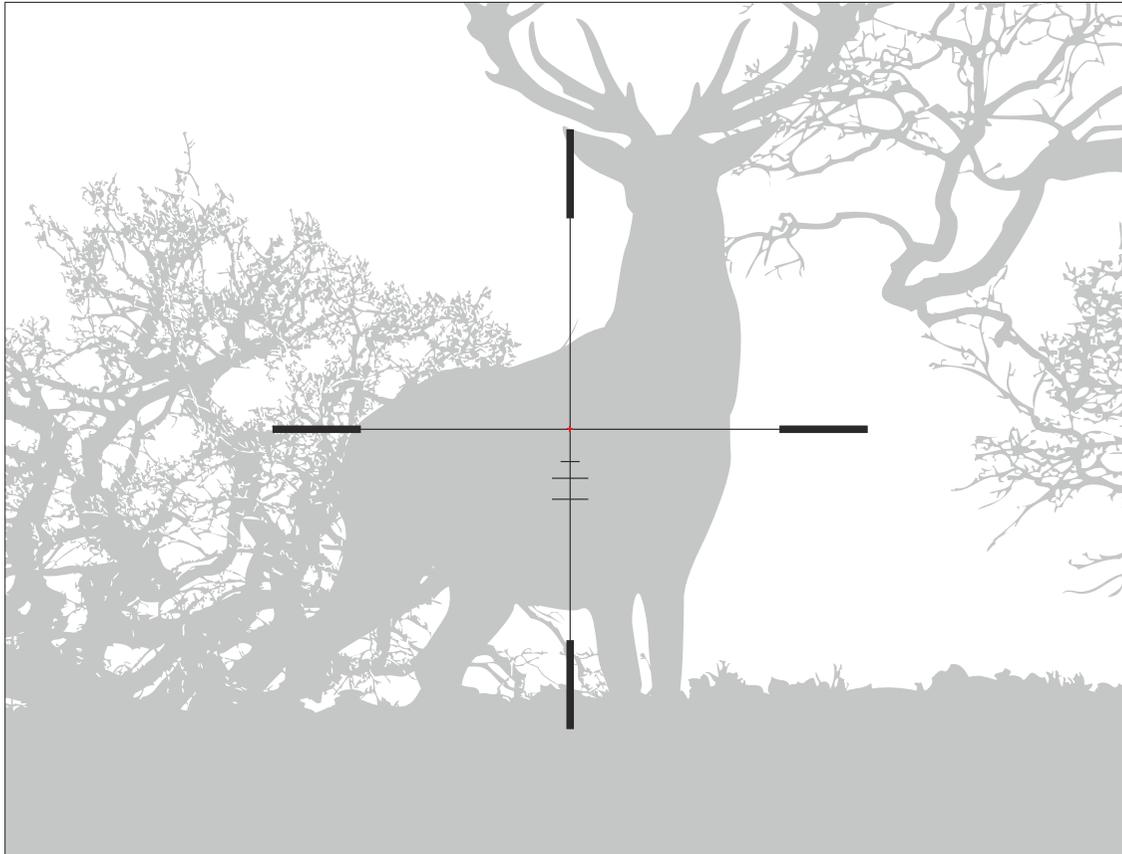

**Reticle parameters**  
(apply to all magnifications)

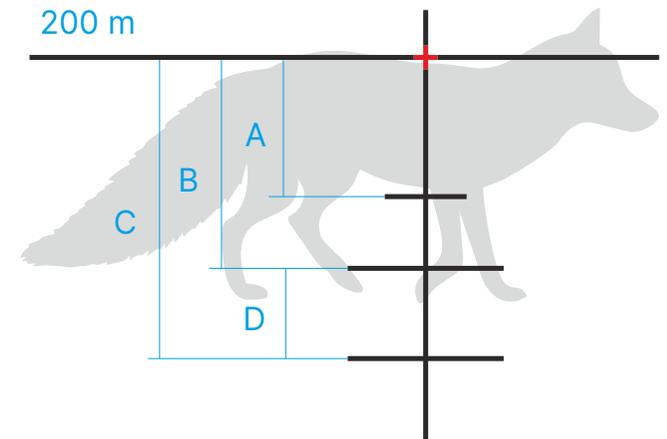


	200 m	300 m
<b>Section A</b>	15 cm (fox body)	23 cm (roe deer body)
<b>Section B</b>	23 cm (roe deer body)	35 cm (wild boar body)
<b>Section C</b>	35 cm (wild boar body)	50 cm (deer body)
<b>Section D</b>	—	15 cm (fox body)

Thermal Imaging Riflescope


## THERMION 2 LRF XL50

# M56Fi

SCALABLE

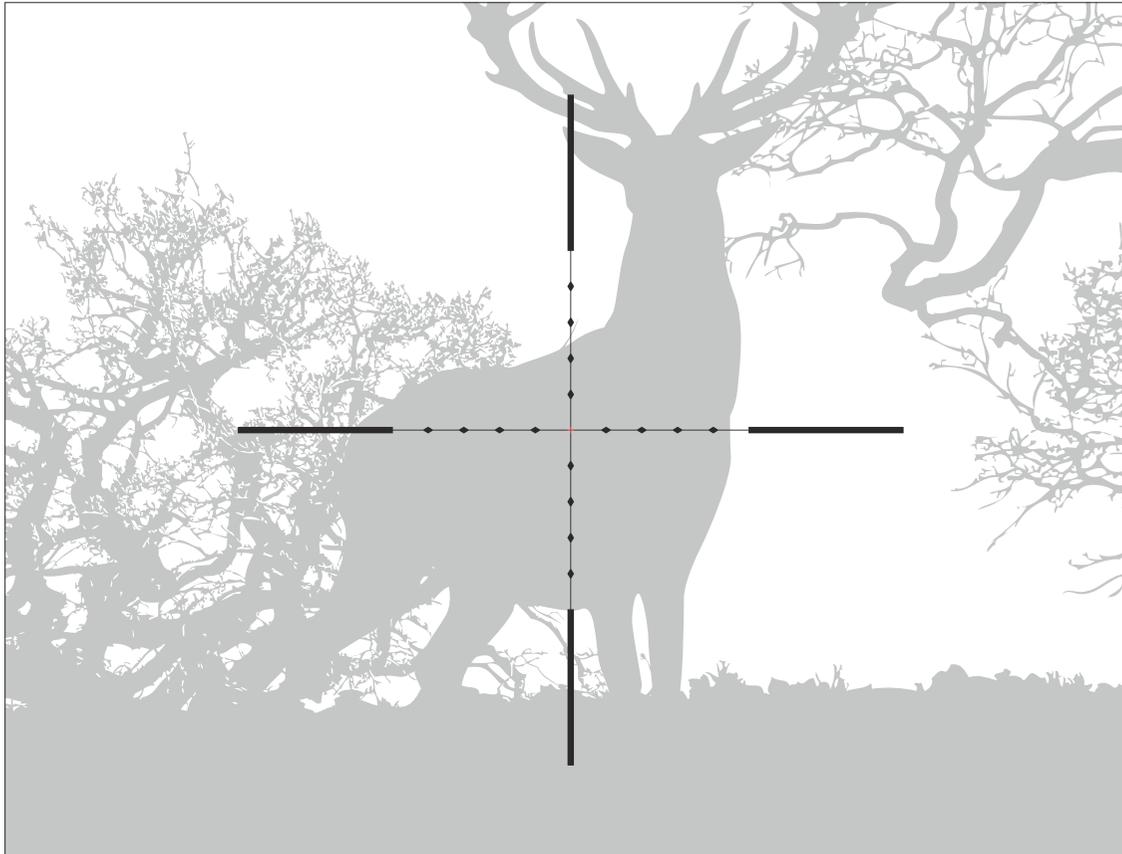

**Reticle parameters**  
(apply to all magnifications)

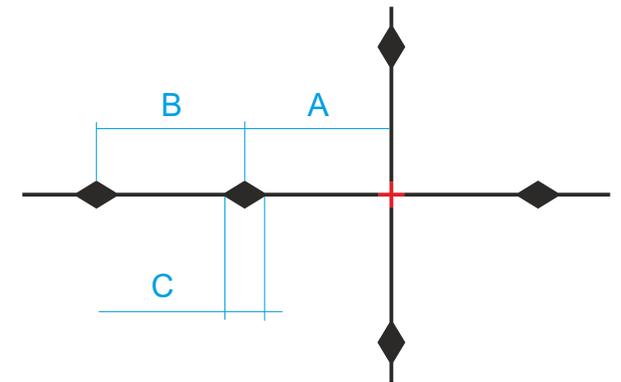


	MOA	CM @ 100 M
<b>Section A</b>	3.5	10 (1 MIL)
<b>Section B</b>	3.5	10 (1 MIL)
<b>Section C</b>	0.86	2.5 (0.25 MIL)


Thermal Imaging Riflescope

## THERMION 2 LRF XL50

↑ TO CONTENT

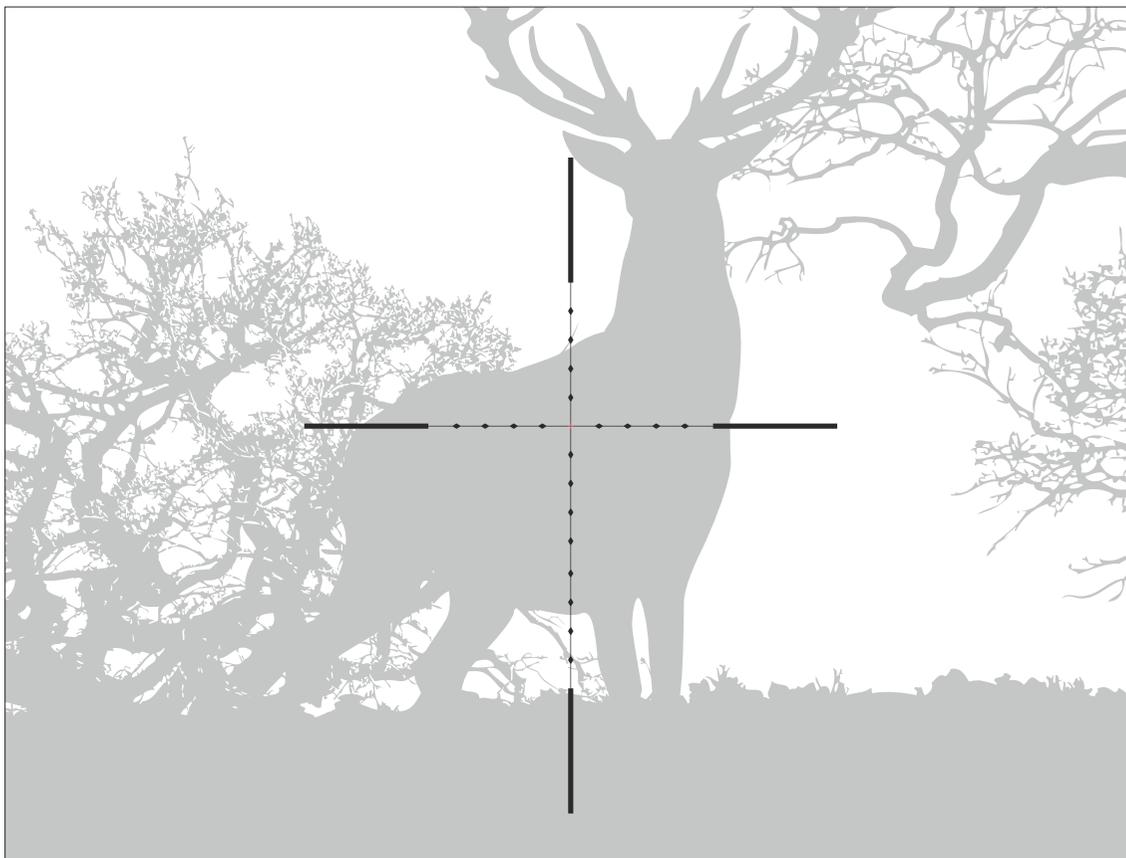

**Reticle parameters**  
(apply to all magnifications)

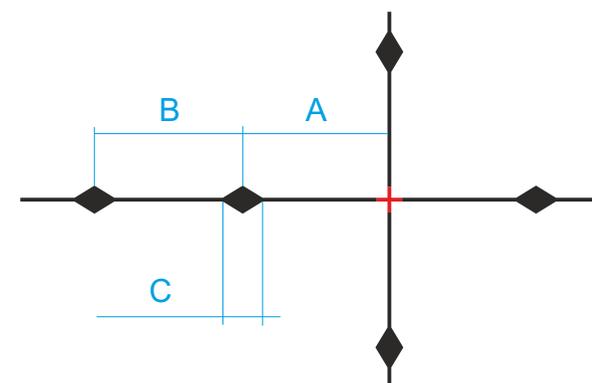

	MOA	CM @ 100 M
<b>Section A</b>	3.5	10 (1 MIL)
<b>Section B</b>	3.5	10 (1 MIL)
<b>Section C</b>	0.86	2.5 (0.25 MIL)

Thermal Imaging Riflescope

## THERMION 2 LRF XL50

↑ TO CONTENT



[www.pulsarvision.com](http://www.pulsarvision.com)