



Reticle Catalogue

Thermal Imaging Riflescope

TRAIL 3 XQ50

Non-scalable reticles

The values of the non-scalable reticles are correct in the following cases:

- when the magnification of the scope is set to minimum
- when "picture in picture" is activated



D50i



C50i



X54i



H50i



X50i



T54



M58i



X51Fi-300



M56Fi (Mil-Dot)




M57Fi (Mil-Dot)

Scalable reticles

Reticle parameters apply to all magnifications

D50i

Reticle parameters
(for minimum magnification)

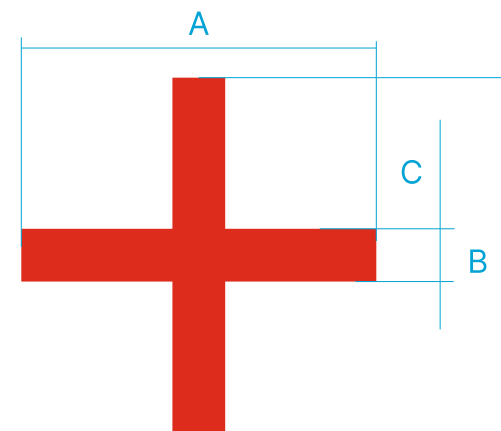

	MOA	cm @ 100 m
Section A	2.6	7.5
Section B	2.6	7.5
Section C	0.4	1.1



Thermal Imaging Riflescope

TRAIL 3 XQ50

[↑ TO CONTENT](#)

C50i

Reticle parameters
(for minimum magnification)

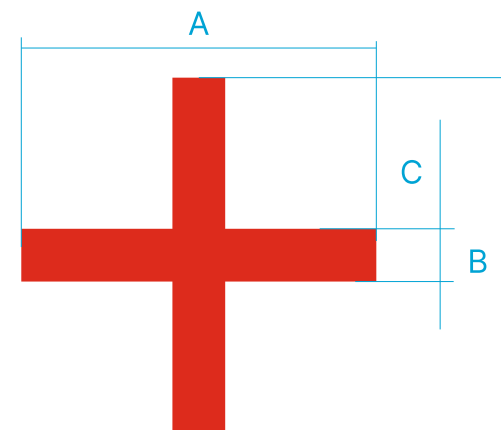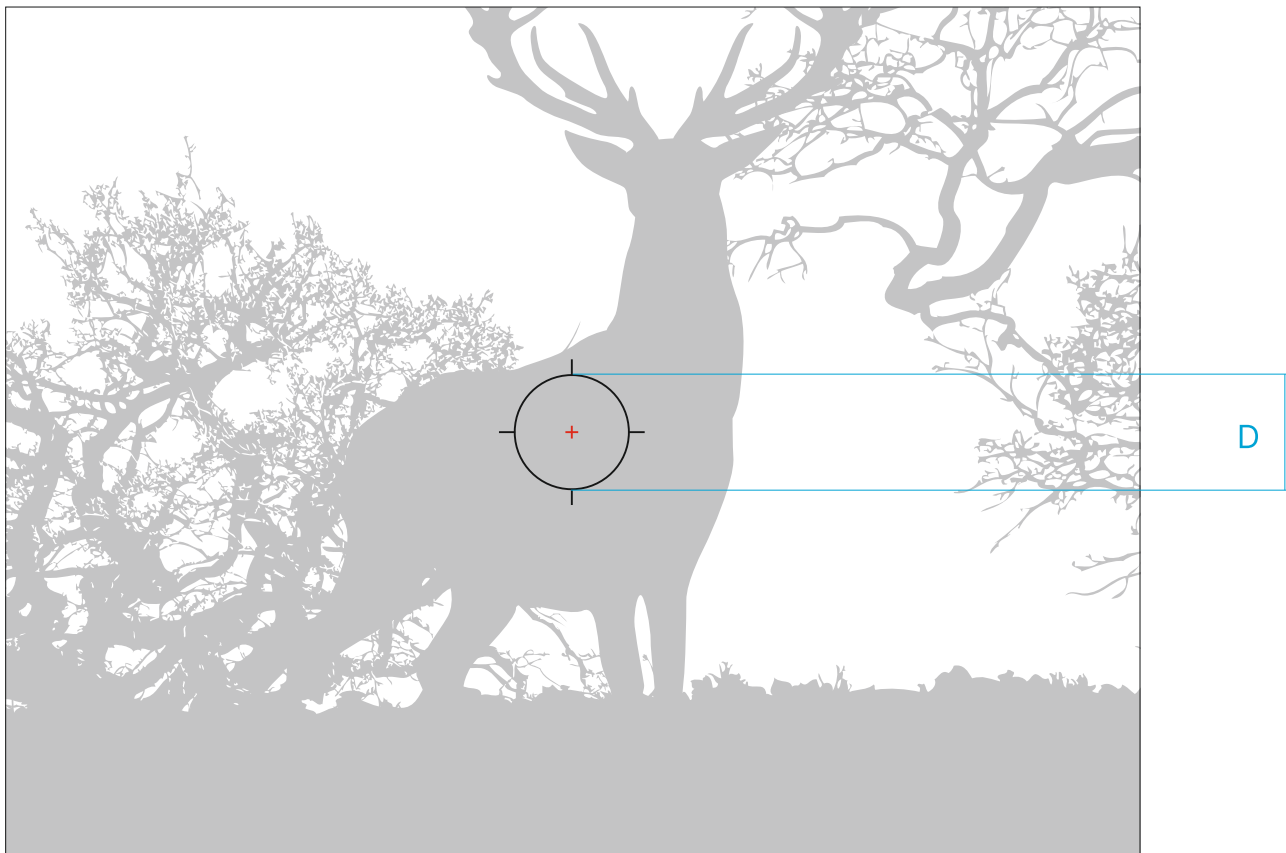

	MOA	cm @ 100 m
Section A	2.6	7.5
Section B	2.6	7.5
Section C	0.4	1.1
Section D	34.4	100



Thermal Imaging Riflescope

TRAIL 3 XQ50

[↑ TO CONTENT](#)

X54i

Reticle parameters
(for minimum magnification)

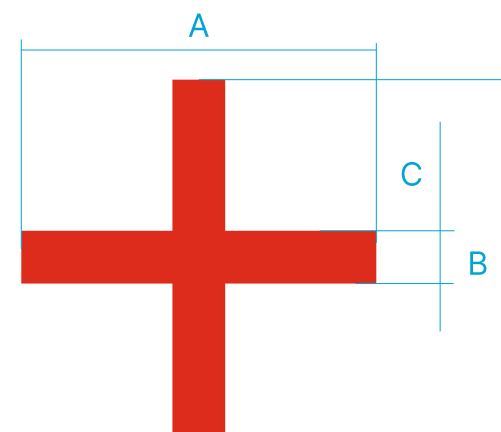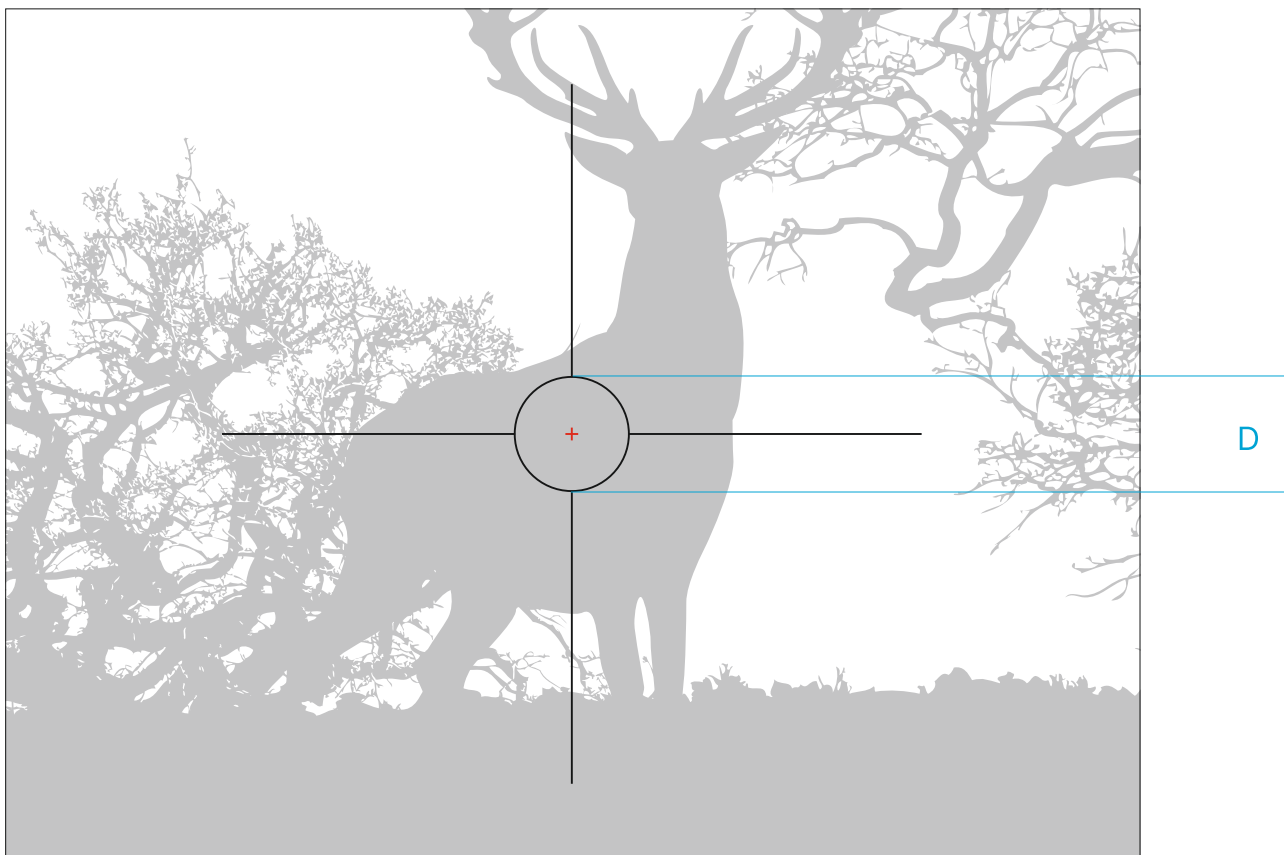


	MOA	cm @ 100 m
Section A	2.6	7.5
Section B	2.6	7.5
Section C	0.4	1.1
Section D	34.4	100

Thermal Imaging Riflescope


TRAIL 3 XQ50

[↑ TO CONTENT](#)

H50i

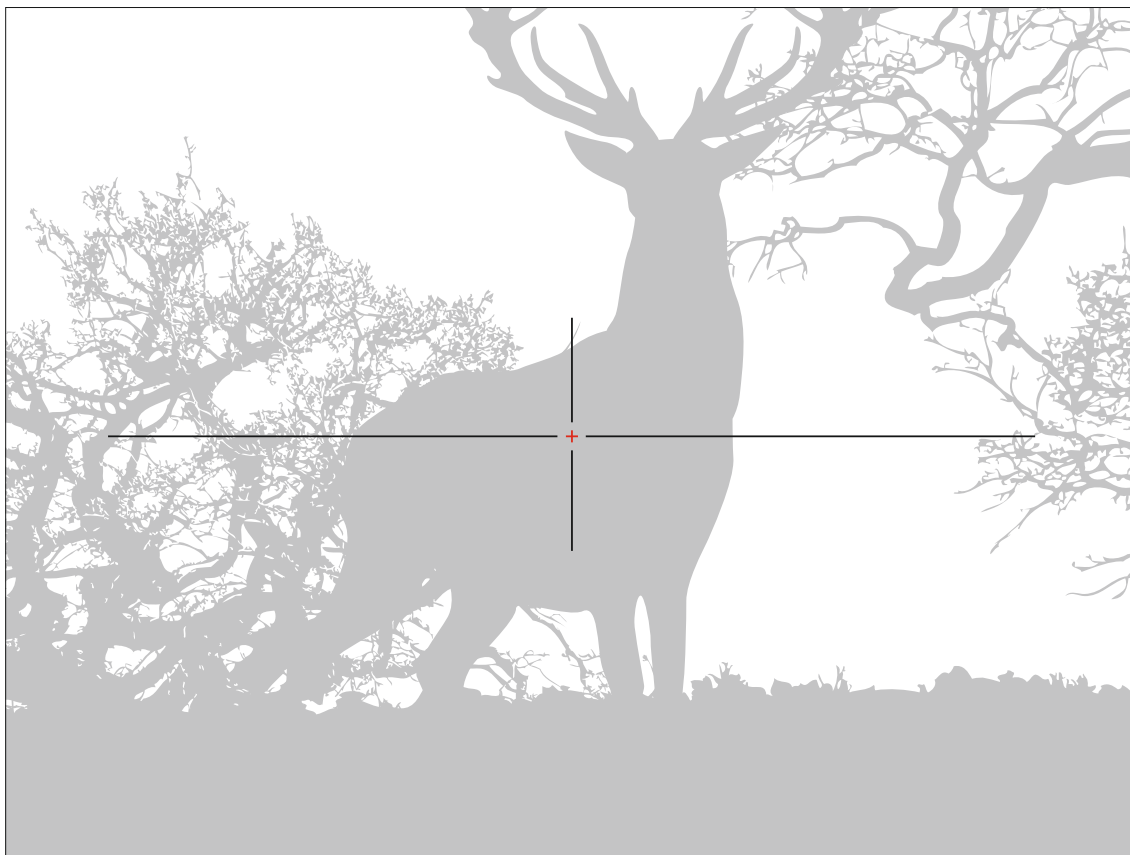

Reticle parameters
(for minimum magnification)

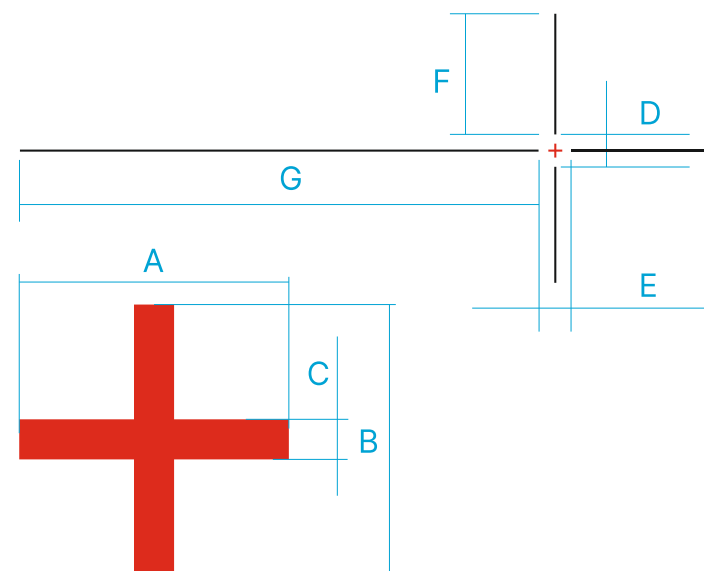

	MOA	cm @ 100 m
Section A	2.6	7.5
Section B	2.6	7.5
Section C	0.4	1.1
Section D	20	58
Section E	20	58
Section F	27	78
Section G	105.5	306.5



Thermal Imaging Riflescope

TRAIL 3 XQ50

[↑ TO CONTENT](#)

X50i

Reticle parameters
(for minimum magnification)

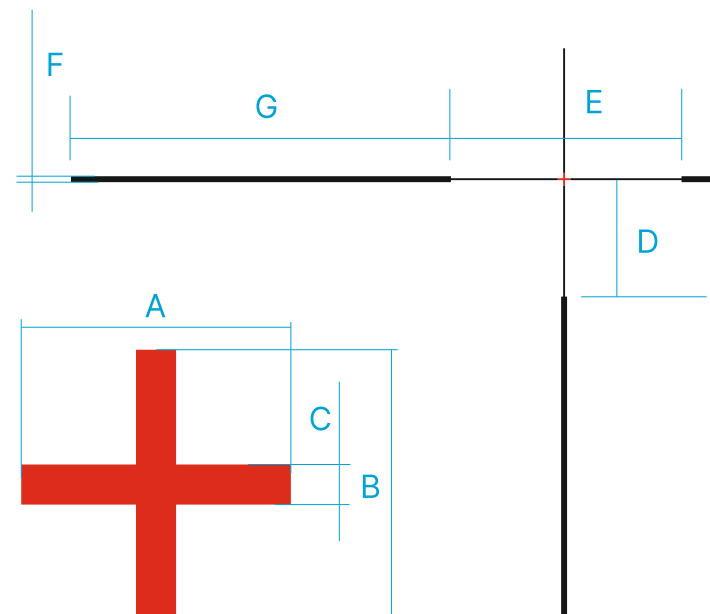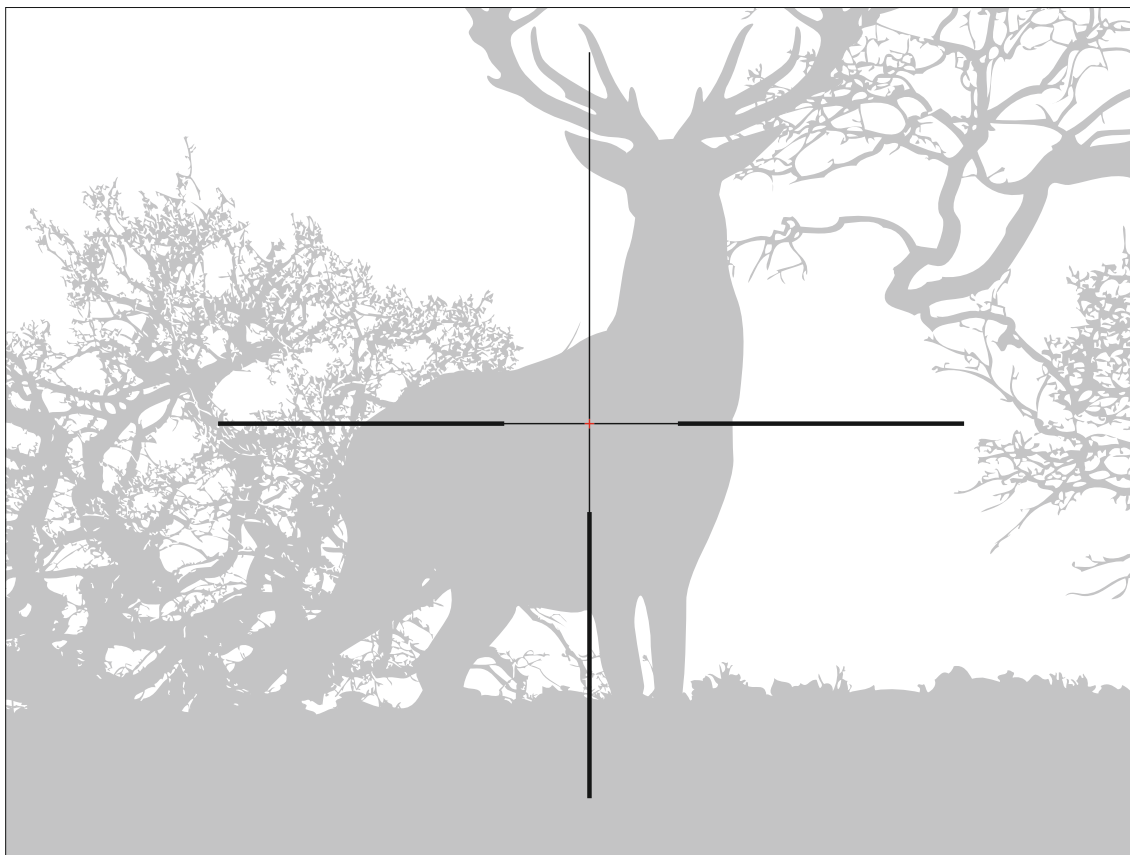


	MOA	cm @ 100 m
Section A	2.6	7.5
Section B	2.6	7.5
Section C	0.4	1.1
Section D	17.2	50
Section E	34.4	100
Section F	1.2	3.2
Section G	98.3	285.5

Thermal Imaging Riflescope


TRAIL 3 XQ50

[↑ TO CONTENT](#)

T54

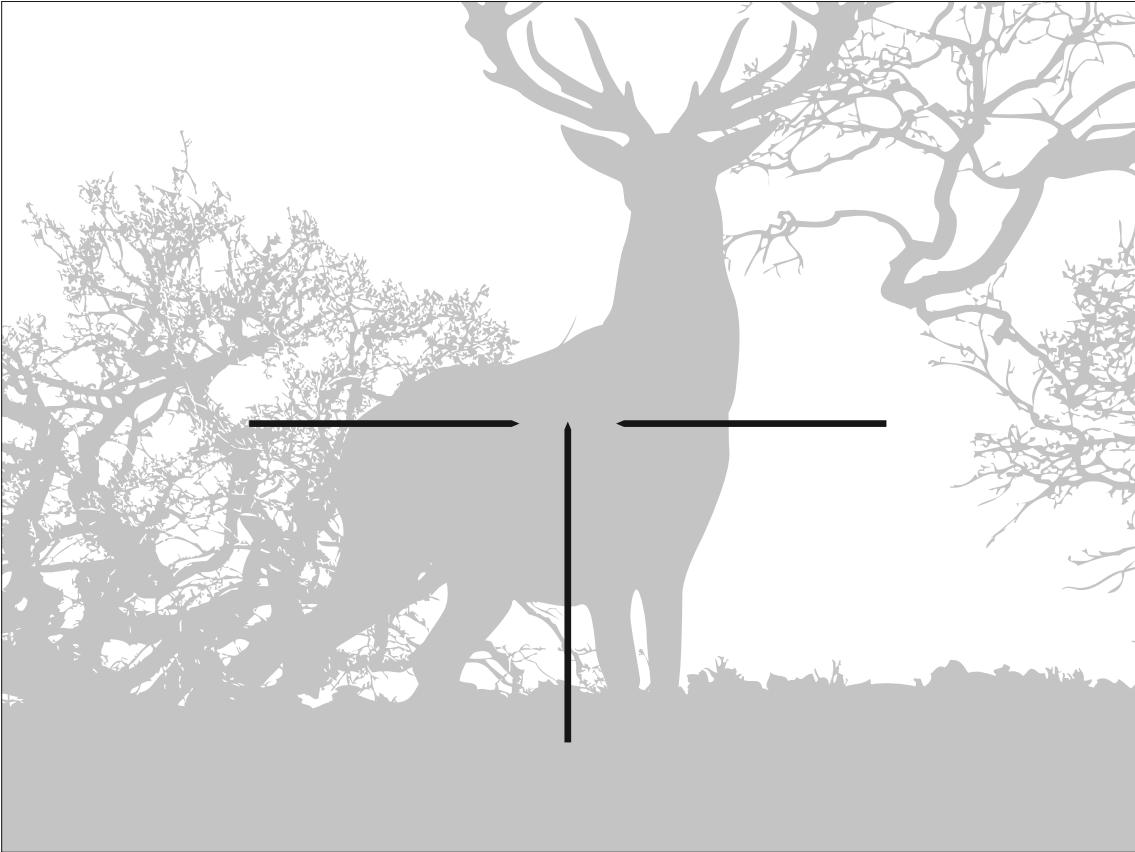

Reticle parameters
(for minimum magnification)


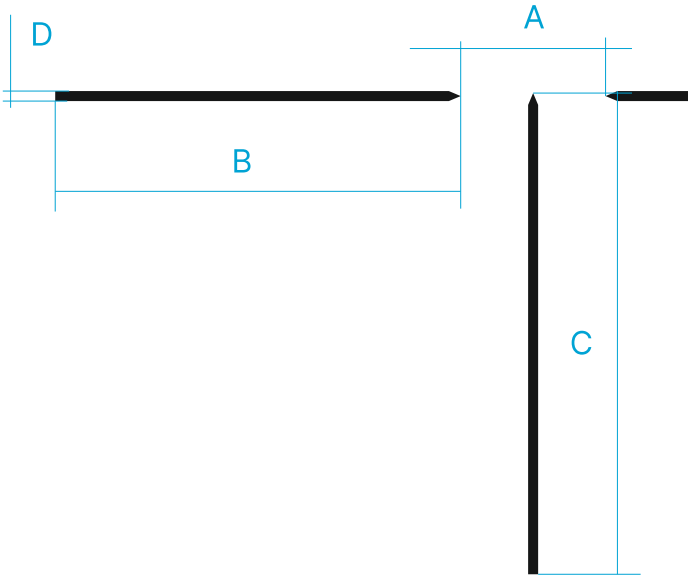


	MOA	cm @ 100 m
Section A	34.4	100
Section B	98.3	286
Section C	116	336
Section D	2.6	7.5

Thermal Imaging Riflescope
TRAIL 3 XQ50

M58i

Reticle parameters

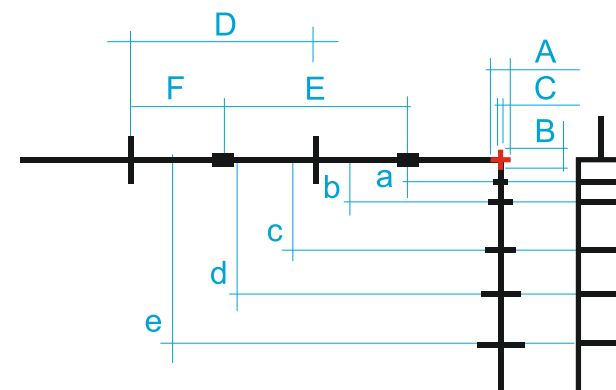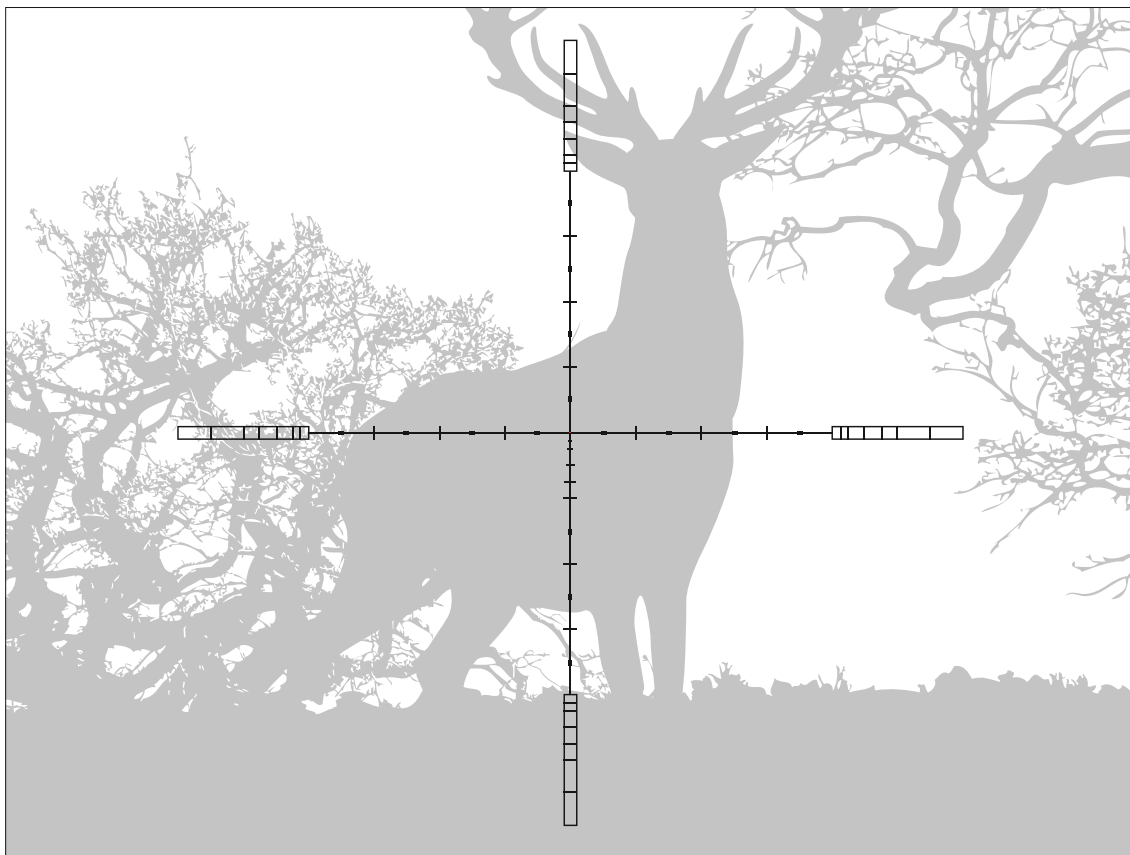

	MOA	cm @ 100 m
Section A	1.1	3.2 on 3x magnification
Section B	1.1	3.2 on 3x magnification
Section C	0.4	1.1 on 3x magnification
Section D	3.5	10 (1 mil) on 24x magnification
Section E	3.5	10 (1 mil) on 24x magnification
Section F	3.5	10 (1 mil) on 12x magnification

Section a	1 mil (10 cm @ 100 m) on 3x magnification
Section b	1 mil (10 cm @ 100 m) on 6x magnification
Section c	1 mil (10 cm @ 100 m) on 12x magnification
Section d	1 mil (10 cm @ 100 m) on 18x magnification
Section e	1 mil (10 cm @ 100 m) on 24x magnification


Thermal Imaging Riflescope

TRAIL 3 XQ50


[↑ TO CONTENT](#)

X51 Fi-300

SCALABLE

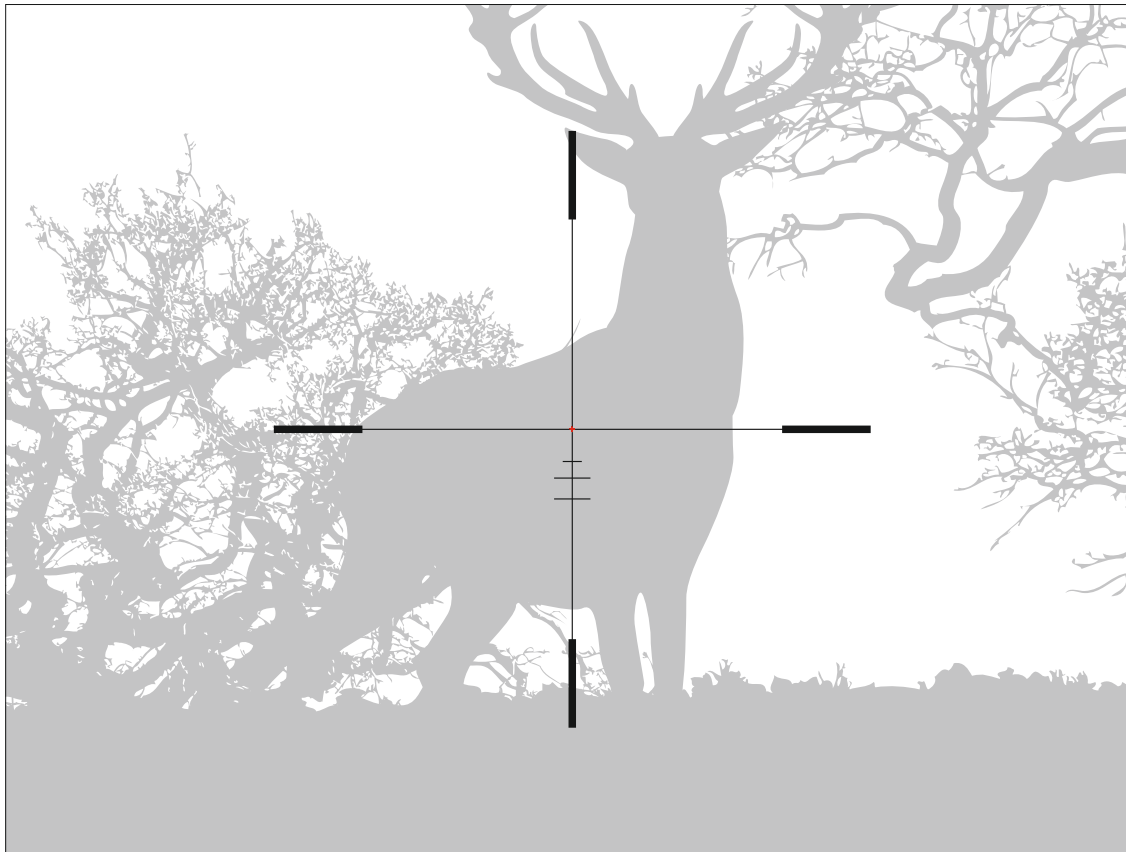

Reticle parameters
(apply to all magnifications)

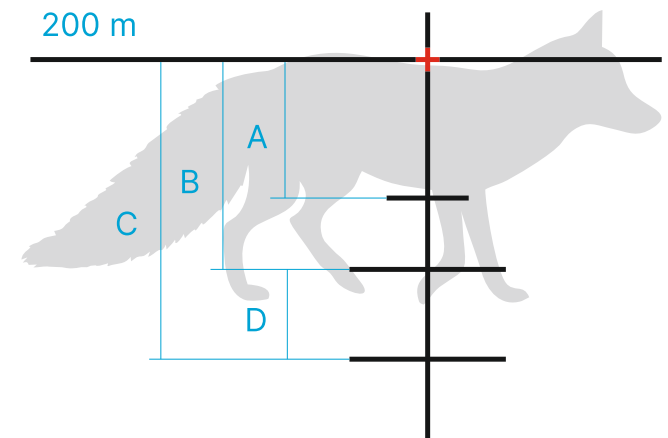


	200 m	300 m
Section A	15 cm (fox body)	23 cm (roe deer body)
Section B	23 cm (roe deer body)	35 cm (wild boar body)
Section C	35 cm (wild boar body)	50 cm (deer body)
Section D	—	15 cm (fox body)


Thermal Imaging Riflescope

TRAIL 3 XQ50

[↑ TO CONTENT](#)

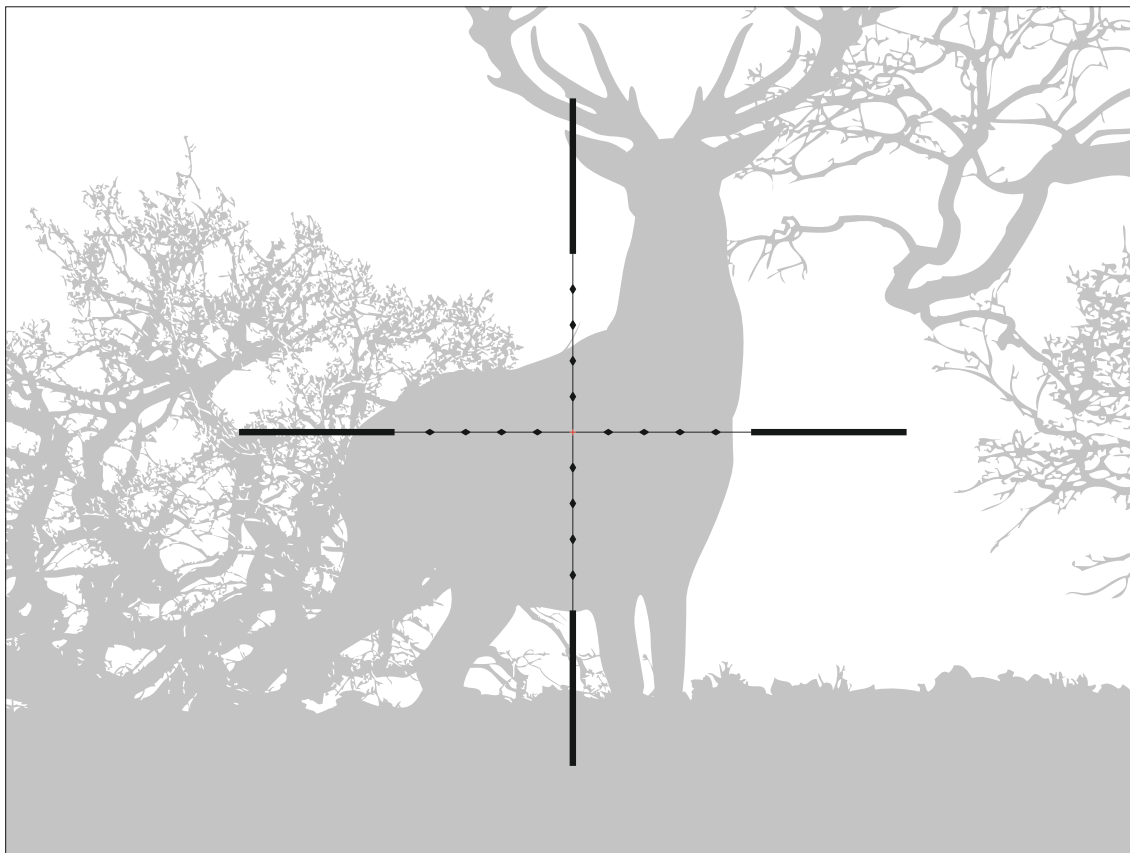

Reticle parameters
(apply to all magnifications)

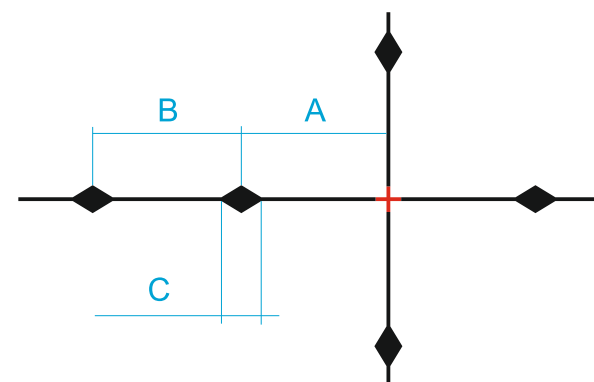


	MOA	cm @ 100 m
Section A	3.5	10 (1 MIL)
Section B	3.5	10 (1 MIL)
Section C	0.86	2.5 (0.25 MIL)


Thermal Imaging Riflescope

TRAIL 3 XQ50

[↑ TO CONTENT](#)

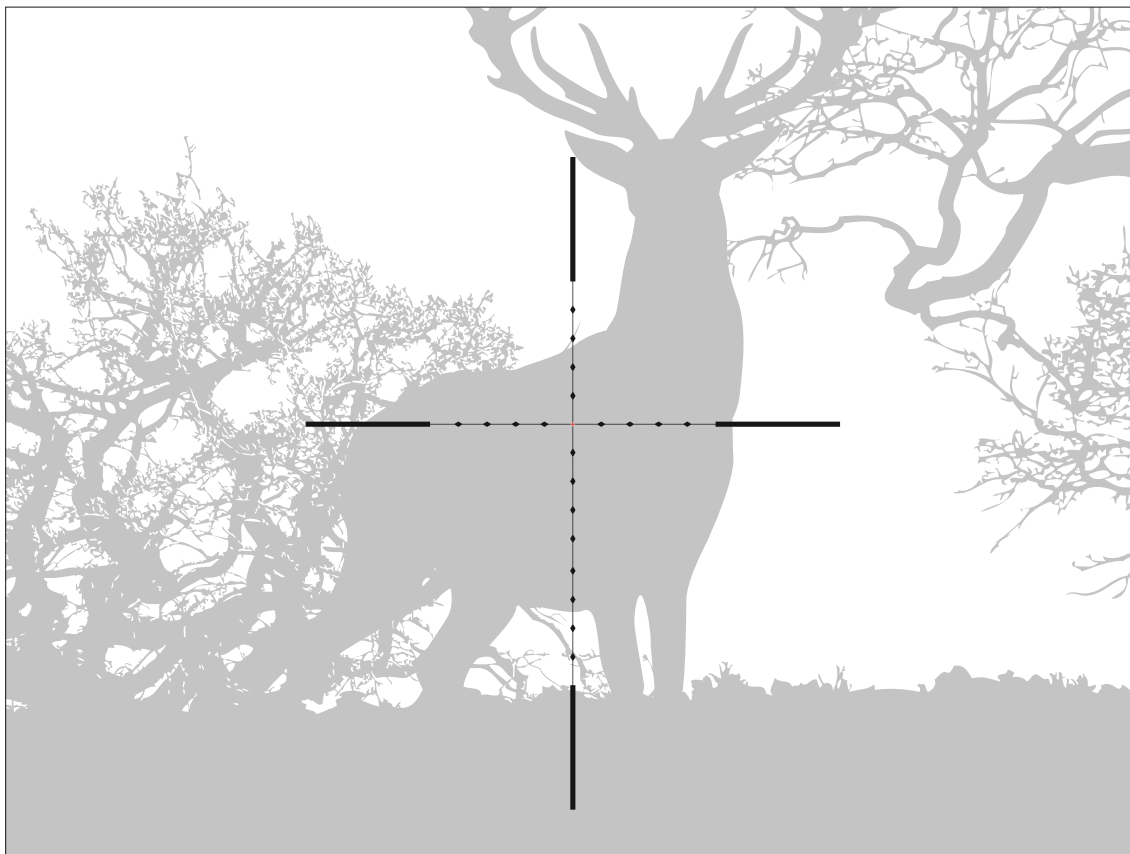

Reticle parameters
(apply to all magnifications)

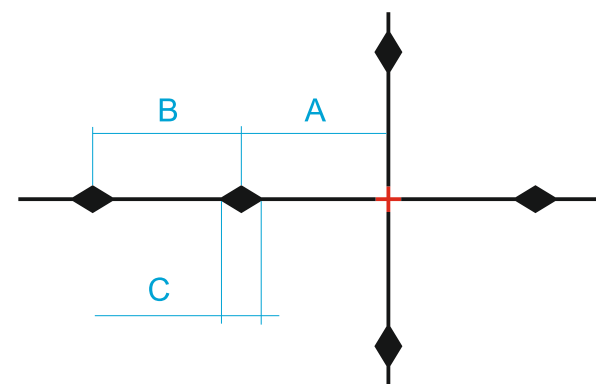

	MOA	cm @ 100 m
Section A	3.5	10 (1 MIL)
Section B	3.5	10 (1 MIL)
Section C	0.86	2.5 (0.25 MIL)

Thermal Imaging Riflescope

TRAIL 3 XQ50

[↑ TO CONTENT](#)



www.pulsarvision.com